



**OEM6 Series – WVR 120V ac Single Phase**

Models	OEM6-15W-120	OEM6-20W-120
<b>Mfg Part #</b>	003-00316	003-00326
<b>Voltage/Hz</b>	120V ac nominal 50-60 Hz	120V ac nominal 50-60 Hz
<b>Max. Load</b>	15 amps	20 amps
<b>Chassis</b>	6.7" x 5.7" aluminum chassis, with 2.3" sides on rear & half of left side	
<b>Mounting</b>	3 - 0.161" holes in bottom of chassis	
<b>Ground Connect</b>	ground stud with nut	
<b>Wire Connector &amp; recommended attachment</b>	Screw terminal block, use #8 spade or fork crimp terminal. Check line wiring for hot/neutral reversal prior to connecting this filter. Hot/neutral reversal is a critical safety issue and will prevent this product from functioning effectively.	
<b>Over-current Protection</b>	Filter must be installed on a branch circuit with 15 amp over-current protection	Filter must be installed on a branch circuit with 20 amp over-current protection
<b>Weight</b>	3.25 lbs	3.25 lbs
<b>Dimensions</b>	2.25"H x 6.7"W x 5.7"D	2.25"H x 6.7"W x 5.7"D
<b>Boxed Dim./Wt.</b>	8"H x 8"W x 3"D/ 4 lbs	8"H x 8"W x 3"D/ 4 lbs

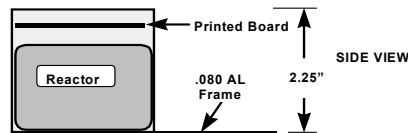

3162119

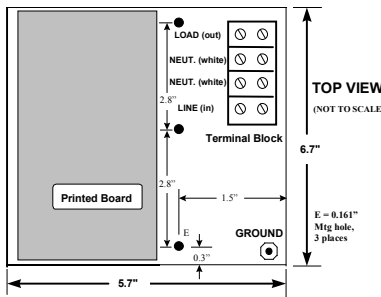

**X10** Carrier Current Compatible

<b>Specifications</b>	
<b>Voltage Ratings</b>	US 120 Volt, single phase (one hot leg & a neutral leg tied to earth ground at service entrance). Will operate over a voltage range of 85 - 175 volts with Spectrum WVR technology (MCOV=175Vac). Full load regulation 1%. Check line wiring for hot/neutral reversal prior to connecting this filter. Hot/neutral building wiring reversal can compromise any appliance's safety and performance.
<b>Operating Temperature Range</b>	0-40 deg. C
<b>Technology</b>	Spectrum WVR® Wide Voltage Range filter technology
<b>Mode</b>	Mode 1 applications, L-N (ground wire protection)
<b>Safety Certifications</b>	CSA 22.2 No. 8-M1986, UL 1283 5 <sup>th</sup> edition
<b>Limiters</b>	Series surge reactor current limiter; cascaded, auto-tracking dual polarity dynamic surge and noise sensing; bi-modal dynamic filtering. Parameters optimized for switch-mode power supply protection.
<b>Dynamic filtering Onset</b>	172 volts nominal, 2 volts above peak line voltage (auto-tracking- WVR).
<b>Max. Surge Voltage Let-through*</b>	130 Volts above peak line voltage @ 6,000 Volts, 3,000 Amps for ANSI C62.41 Category B3/C1 Combination Wave.
<b>Max. Applied Pulse Voltage</b>	6,000 volts (1.2 x 50 μs – ANSI C62.41 Combination Wave)
<b>Max. Applied Pulse Current</b>	>100,000 amperes applied (unlimited due to internal current limiting) (8 x 20 μs).
<b>Joule Rating</b>	Not applicable to this technology. No MOV's to wear out.
<b>Endurance Rating</b>	1,000 worst case pulses: ANSI C62.41, Category B3/C1 pulses (6,000 Volts, 3,000 Amperes); >10,000 pulses at 4,000 Volts; >100,000 pulses at 2,000 Volts.
<b>Filter Slew Rate</b>	5,000 volts/μs disturbance reduced to 35 v/μs within AC power wave envelope; 10.0 v/us outside the power wave envelope.
<b>EMI-RFI Filter Response</b>	Bi-directional, wave tracking: With 50 ohm Rgen., load: 7 kHz @ 3 dB; 25 dB @100 kHz; 38 dB @300 kHz.

\* Note: Surge voltage let-through is the peak voltage that exceeds the powerline peak voltage.

**100% Surge Protection, 0% Failure • Are you Zero Surge protected?**

Zero Surge Inc. • 889 State Route 12 • Frenchtown, NJ 08825 • Tel.: 908-996-7700 • Fax: 908-996-7773

URL: [www.ZeroSurge.com](http://www.ZeroSurge.com) • Email: [info@zerosurge.com](mailto:info@zerosurge.com)

oem6\_w120\_etl.doc